

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number  
**WO 2005/083487 A1**

(51) International Patent Classification<sup>7</sup>: **G02B 7/00**,  
G03F 7/20

(21) International Application Number:  
PCT/EP2004/004235

(22) International Filing Date: 20 April 2004 (20.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10 2004 009 243.5  
26 February 2004 (26.02.2004) DE

(71) Applicant (for all designated States except US): **CARL ZEISS SMT AG** [DE/DE]; Carl-Zeiss-Strasse 22, 73447 Oberkochen (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STOMMEN**,


Bernard [NL/NL]; Hooiland 18, NL-5663 HK Geldrop (NL). **SOEMERS, Herman** [NL/NL]; Vaanakker 70, NL-5731 JN Mierlo (NL). **VAN DEUREN, Franz** [NL/NL]; Crocuslaan 26, NL-5551 AH Valkenswaard (NL). **BROM, Paul, P., A.**, [NL/NL]; Aletta Jacobsplein 86, nl-5612 RG Eindhoven (NL). **KWAN, Yim-Bun, Patrick** [GB/DE]; Warthelandstr. 68, 73431 Aalen (DE). **XALTER, Stefan** [DE/DE]; Frühlingstr. 7, 73447 Oberkochen (DE). **DEUFEL, Peter** [DE/DE]; Schulstrasse 38, 73432 Aalen (DE).

(74) Agents: **LORENZ, Werner** et al.; Alte Ulmer Str. 2, D-89522 Heidenheim (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,

[Continued on next page]

(54) Title: **HOUSING STRUCTURE**

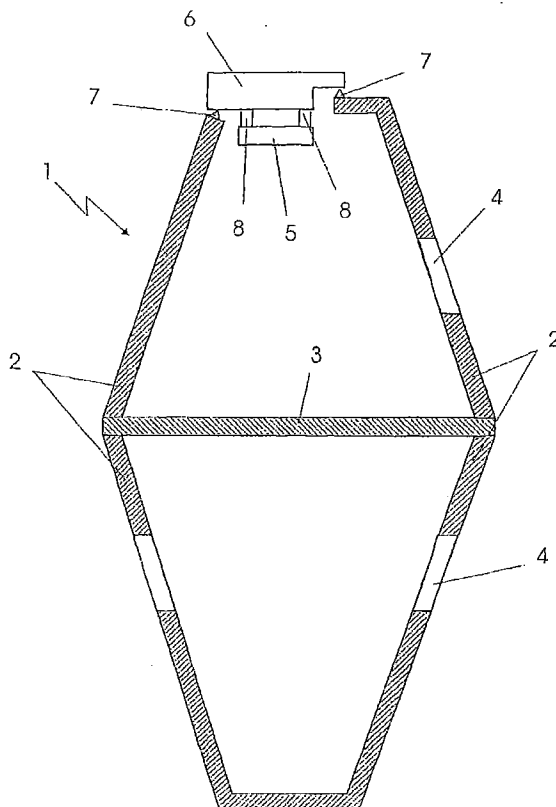

(57) Abstract: A housing structure has a frame structure (1) on which there are arranged via connecting elements (7) several optical elements (5) which are held in mounts (6) or structural modules (6'). The optical elements (5) are detachably connected to the frame structure (1) with their mounts (6) or structural modules (6') and connecting elements (7) in such a way that in the installed state they are integrated as bearing units in the frame structure (1).

WO 2005/083487 A1



MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

### HOUSING STRUCTURE

The invention relates to a housing structure which has a frame structure on which there are arranged via connecting elements several optical elements which are held in mounts or structural modules.

A housing structure of this type is described, for example, in EP 1 278 089 A2. It has frame parts and connecting plates on which several optical elements are fastened, bores or openings being provided in part for this purpose. The housing structure forms a stable self-supporting unit. Appropriate auxiliary constructions with fastening elements are required for fastening the optical elements with their mounts or structural modules. The mounting is relatively complicated, and an additional installation space is required for the connection. The optical elements connected to the frame structure constitute virtually separate parts on the housing structure and have little dynamic influence on the housing structure. Moreover, thermal influences and influences of internal stress are difficult to calculate.

The object of the present invention is to avoid the above-named disadvantages of the prior art, in particular to create a housing structure, there being a simpler and reproducible connection between the housing structure and the optical elements arranged therein.

This object is achieved according to the invention when the optical elements are detachably connected to the frame structure with their mounts or structural modules and connecting

elements in such a way that in the installed state they are integrated as bearing units in the frame structure.

The inventive design results in a uniform mechanical support structure both for the housing structure with its frame structure, and for the optical elements with their mounts and structural modules in addition to connecting elements. The optical elements therefore make a kinematic contribution to the stability or stiffness of the housing structure. This means that without the optical elements inserted the housing structure alone is not self-supporting or sufficiently stable, but that an integral load-bearing unit results after installation of the optical elements.

In addition to a saving of material and weight and of installation space, a clearer and reproducible connection is created in this way between the frame structure and the optical elements. The individual optical elements, which are arranged either individually in a mount, or else in subgroups or in structural modules, can be separately constructed, preadjusted and tested and be installed in the frame structure as appropriately prefabricated units only after this, and be appropriately adjusted in the process.

The optical elements are preferably supported in kinematically determined fashion. This can be performed, for example, by setting members which can be adjusted in six degrees of freedom. A hexapod, for example, is suitable for this purpose.

Further advantageous refinements and developments emerge from the subclaims and from the following exemplary embodiments

described in principle with the aid of the drawings, in which:

Figure 1 shows an illustration of the principle of a housing structure with an inserted optical element;

Figure 2 shows a further configuration of a frame structure with a multiplicity of optical elements;

Figure 3 shows a detail of the housing structure with an optical element supported in a mount;

Figure 4 shows a frame structure in an exploded fashion; and

Figures 5-8 show various mounts/structural modules with fastening points.

The housing structure illustrated in Figures 1 and 2 has a frame structure 1 which is assembled from several frame parts 2 and reinforcing plates 3. The frame structure 1 is provided with a multiplicity of cutouts or openings 4. Optical elements 5 with their mounts 6 are inserted into the openings 4. Connecting elements 7 (not illustrated in more detail) are provided for this purpose. Setting members or actuators 8 are arranged between the mount 6, which can be constructed as a base element, and the optical element 5, for example, a mirror 5. The arrangement and configuration of the setting members 8 are not described in more detail below, since they are known in principle. The setting members 8 should as far as possible permit adjustments of the optical element 5 in six

degrees of freedom, and can be constructed for this purpose as hexapods, for example.

Figure 2 shows a housing structure which can be, for example, an objective housing 9 of a projection objective in micro-lithography, as is described, for example, in more detail in EP 1 278 089 A2. The projection objective 9 can be provided, for example, for EUV lithography for which extremely high demands are placed on accuracy. In this case, the optical elements constitute mirrors 5, for example, "5'" indicating a stop. As may be seen from Figure 1 in the upper area, and from Figure 2, a multiplicity of optical elements 5 with their mounts 6 are inserted into the openings 4 in the frame structure 1. The connecting elements 7 and the mounts 6 are configured in such a way that in the illustrated installed state of the optical elements 5 with their mounts 6 these form a bearing unit with the frame structure 1 or are integrated in the latter in such a way that a stable unit of great rigidity is created in this way.

Figure 3 shows in an enlarged illustration a detail of the frame structure 1 with a frame part 2 to which the mount 6 of the optical element, constructed as a mirror 5, for example, is connected via adapting elements (spacer) 10. A gravity compensator 11 can be arranged between the optical element 5 and the mount 6. The gravity compensator 11 serves the purpose of reducing the weight of the optical element 5 so that the setting members or actuators 8 need to apply smaller forces in order to adjust the optical element 5. Lorenz actuators or piezoelectric elements, for example, can be provided as actuators 8. One or more actuators are provided in each case as setting members 8 for the purpose of adjusting

an optical element 5. Furthermore, the mount 6 is provided with sensors 12 for determining the position of the optical element 5. The application US 60/502,334 contains further information on this. It is a part of this application in its entirety.

Instead of simple mounts 6 for each optical element 5, it is also possible, of course, to provide structural modules 6' as so-called subgroups, if required, several optical elements 5 being held in a structural module, as is indicated, for example, in Figure 2 by the structural module 6'. As may be seen, in this case the structural module 6' provides a transverse connection between the laterally opposite frame parts 2, and lends the frame structure 9 a high degree of stability in this way.

The frame parts 2 of the frame structure 1, the mounts 6 and the structural modules 6' should consist of a material with at least approximately the same coefficients of thermal expansion so that no internal stresses are introduced, particularly in the case of the occurrences of heating that occur in EUV lithography. For the same reason, materials with very low coefficients of thermal expansion should also be used such as, for example, glass ceramics (Zerodur® from Schott Glas).

Figure 4 shows a frame structure 9 in a modification of Figure 2. As may be seen, the frame structure 9 is split into several parts, the optical elements with their mounts 6 or structural modules 6' being integrated in the individual components. After appropriate preadjustment, the individual components 9 are then combined in relation to the frame structure 9 so as to form an integral bearing unit.

Various examples of mounts 6 and/or structural modules are illustrated in Figures 5 to 8, with in each case six fastening points for connecting to the frame structure 1. The optical elements 5, which are respectively connected to the mount 6 via actuators 8, are not illustrated here.

The arrows indicate the degree of freedom with which a connecting point is respectively rigidly connected to the frame structure 1. The connecting point is formed to be "softly" in the respective other directions or degrees of freedom. This configuration leads to a so-called kinematic bearing with six degrees of freedom and six supported directions.

As illustrated by the arrows 13, the support directions will advantageously be selected in this case in such a way that they lie respectively in the plane of an associated plate or strut of the frame structure 1.

The course of the arrows 13, and thus of the force direction, is therefore determined in each case by the position and/or site of installation on the frame structure 1, and by the course of the frame structure or frame strut or frame plate at this point.

The six degrees of freedom relate to translations in three coordinate directions, and to rotations about each of the three axes of rotation laid through their centroid. This means that in total six movements are possible, specifically linear movements in terms of the three components in the axial direction of the spatial coordinate system, and rotary



movements in terms of the three components of the rotation about the three axes of rotation.

Figures 5 to 8 respectively show the same principle of connection with the force directions. The directions of the arrows 13 for the six degrees of freedom are a function only of the position of installation, which is shown in Figures 5 to 8 only by way of example for different positions.

Patent claims

1. Housing structure which has a frame structure on which there are arranged via connecting elements several optical elements which are held in mounts or structural modules, characterized in that the optical elements (5) are detachably connected to the frame structure (1) with their mounts (6) or structural modules (6') and connecting elements (7) in such a way that in the installed state they are integrated as bearing units in the frame structure (1).

2. Housing structure according to Claim 1, characterized in that the optical elements (5) are supported on mounts (6) in the form of base elements (6).

3. Housing structure according to Claim 1, characterized in that the mounts (6) or structural modules (6') are provided with setting members (8).

4. Housing structure according to Claim 3, characterized in that actuators (8) are provided as setting members between the optical elements (5) and their mounts (6) or structural modules (6').

5. Housing structure according to Claim 3, characterized in that the optical elements (5) can be adjusted in six degrees of freedom by the setting members (8).

6. Housing structure according to Claim 2, characterized in that adapting elements (10) are arranged between the base elements (6) and the frame structure (1).

7. Housing structure according to Claim 1, characterized in that the mounts (6) or structural modules (6') are connected rigidly to the frame structure (1) in six degrees of freedom via their connecting elements.

8. Housing structure according to Claim 7, characterized in that at least some of the force directions of the six degrees of freedom are located in a plate plane or strut plane of the frame structure (1).

9. Housing structure according to Claim 1, characterized in that gravity compensators (11) are arranged between the optical elements (5) and the mounts (6) or the structural modules (6').

10. Housing structure according to Claim 1, characterized in that the frame structure (1) and the mounts (6) or structural modules (6') with their connecting elements (7) have at least approximately the same coefficient of thermal expansion.

11. Housing structure according to Claim 10, characterized in that the frame structure (1), the mounts (6) or structural modules (6') and the connecting elements (7) consist of materials with a low coefficient of thermal expansion such as Zerodur or Kyocera for example.

12. Housing structure according to Claim 1, characterized by a configuration as an objective housing (9) for a projection objective in microlithography.

13. Housing structure according to Claim 12, characterized in that the objective housing (9) is provided for EUV lithography.

14. Housing according to Claim 13, characterized in that mirrors (5) are provided in the objective housing (9) as optical elements.

1/5

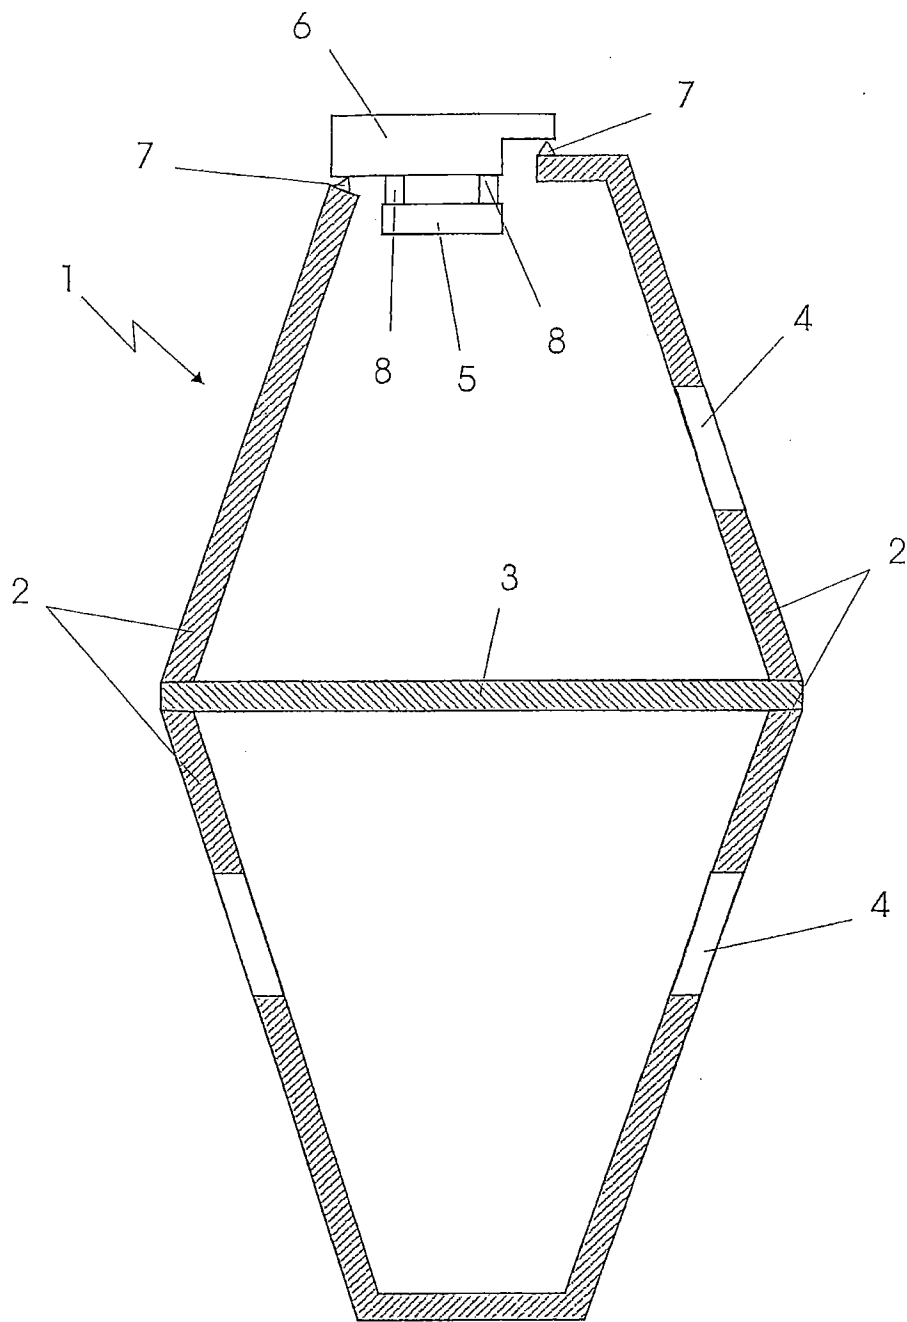


Fig. 1

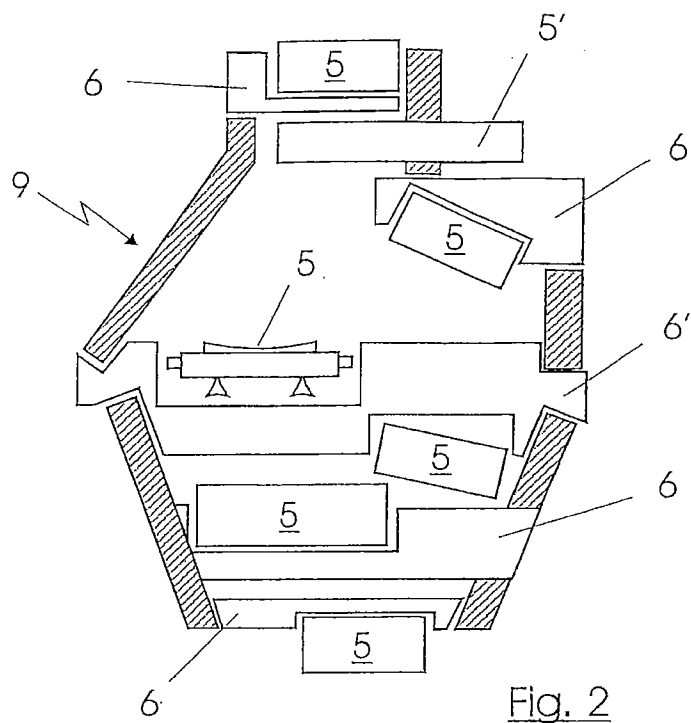


Fig. 2

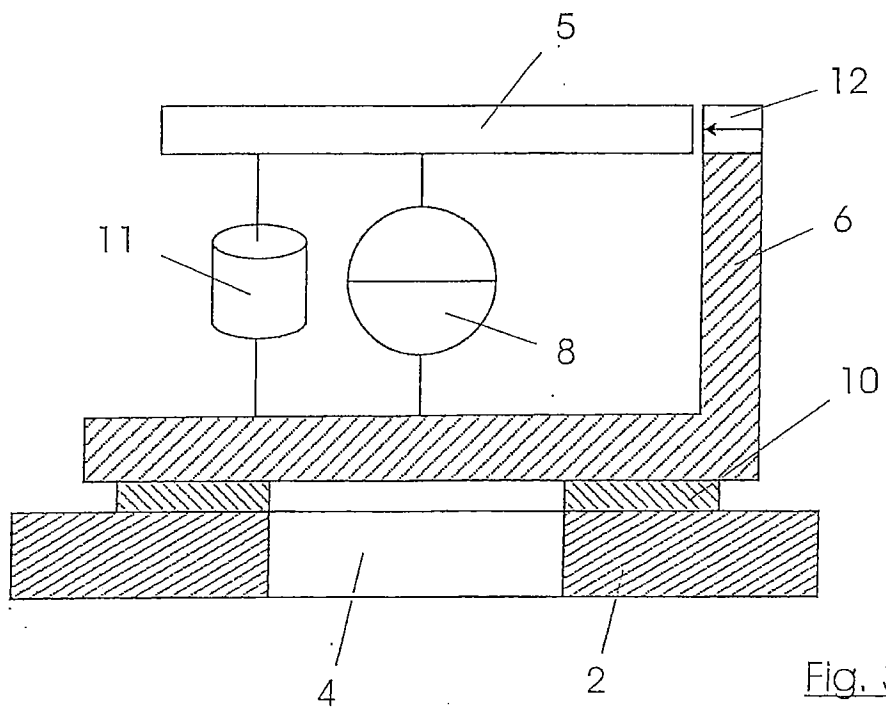


Fig. 3

3/5

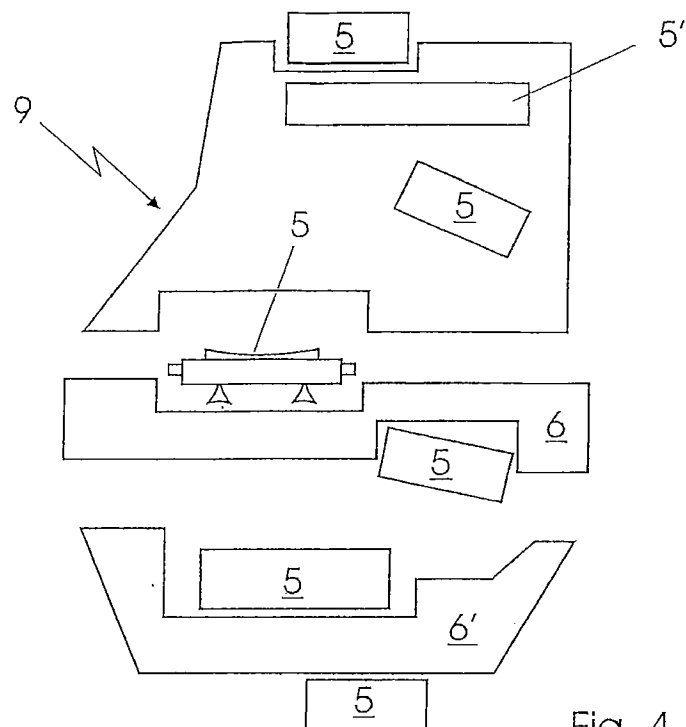


Fig. 4

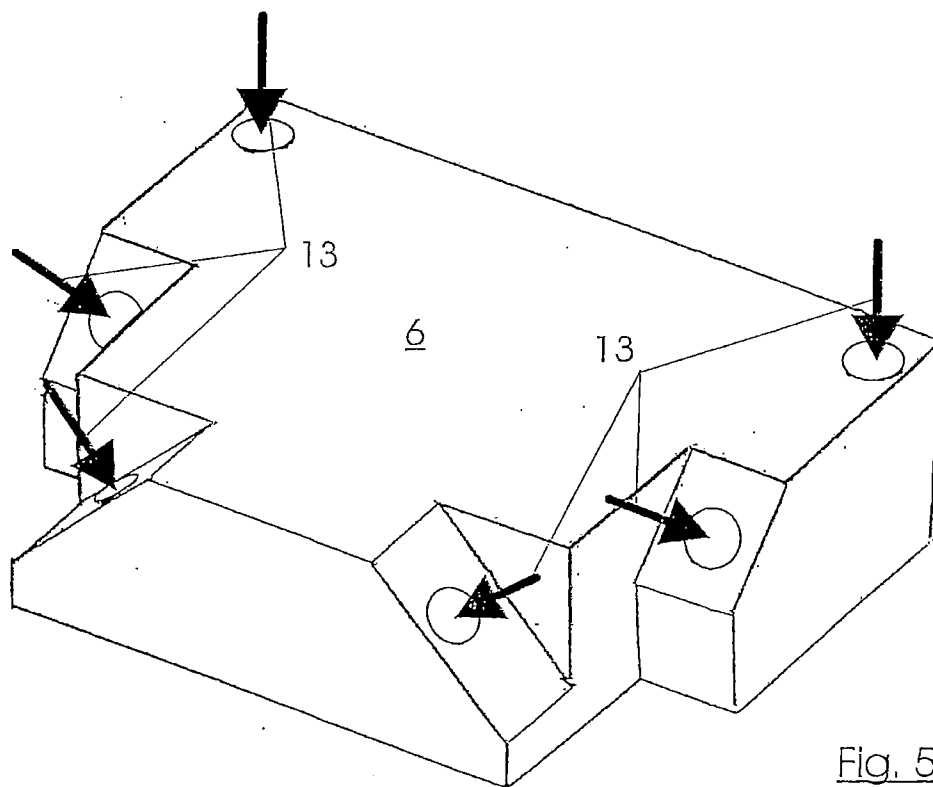
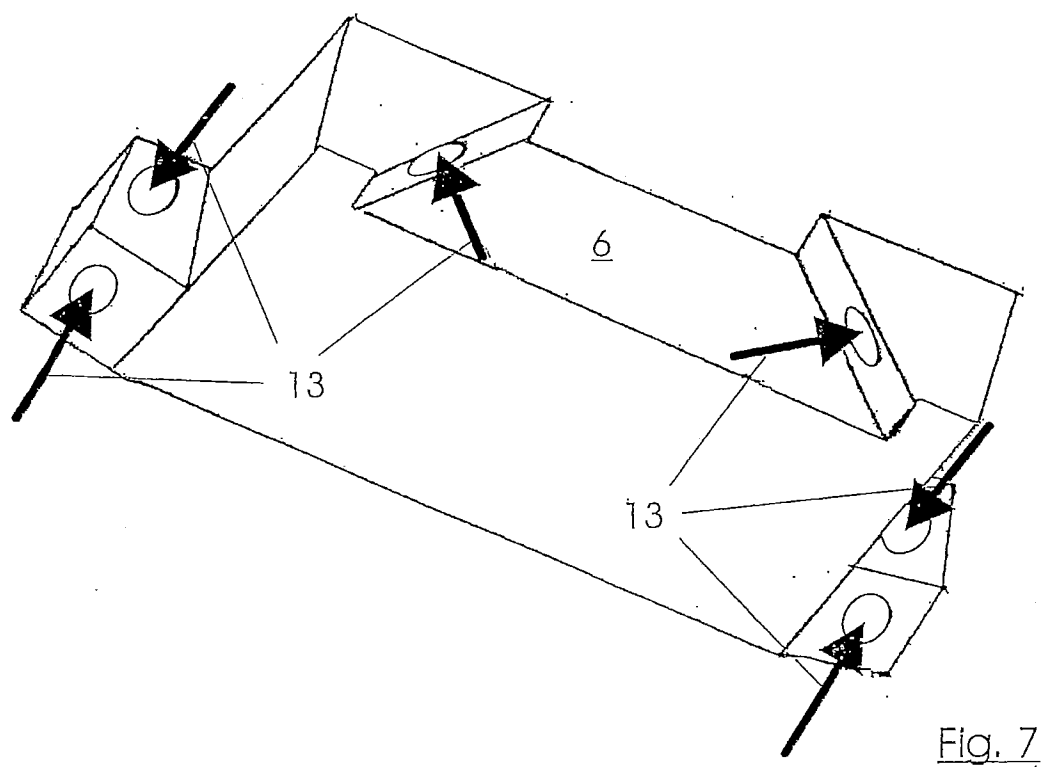
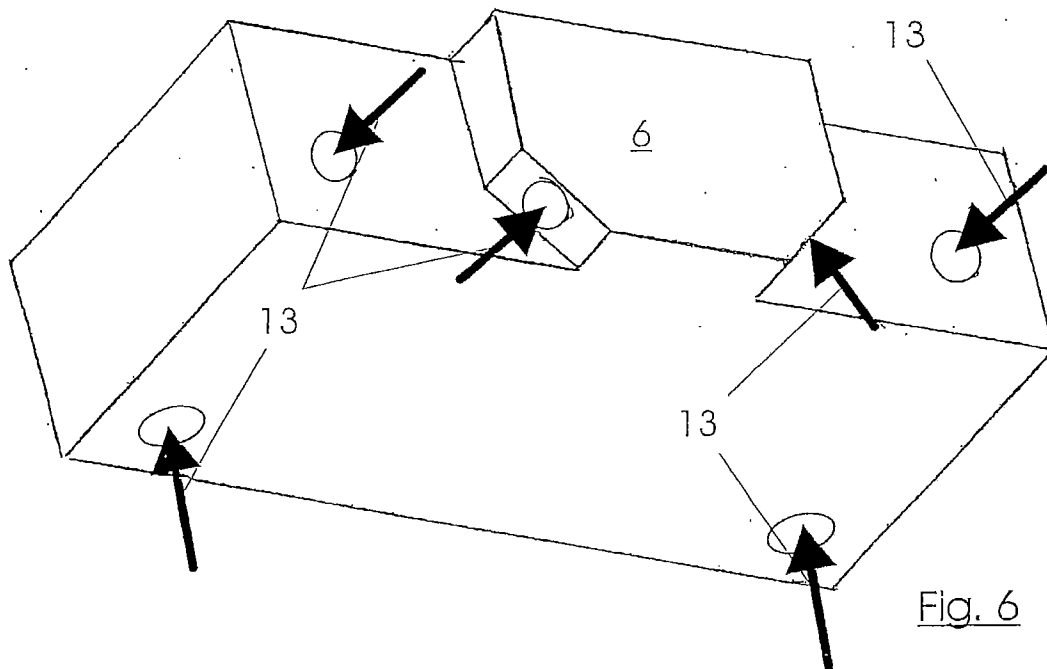


Fig. 5

4/5





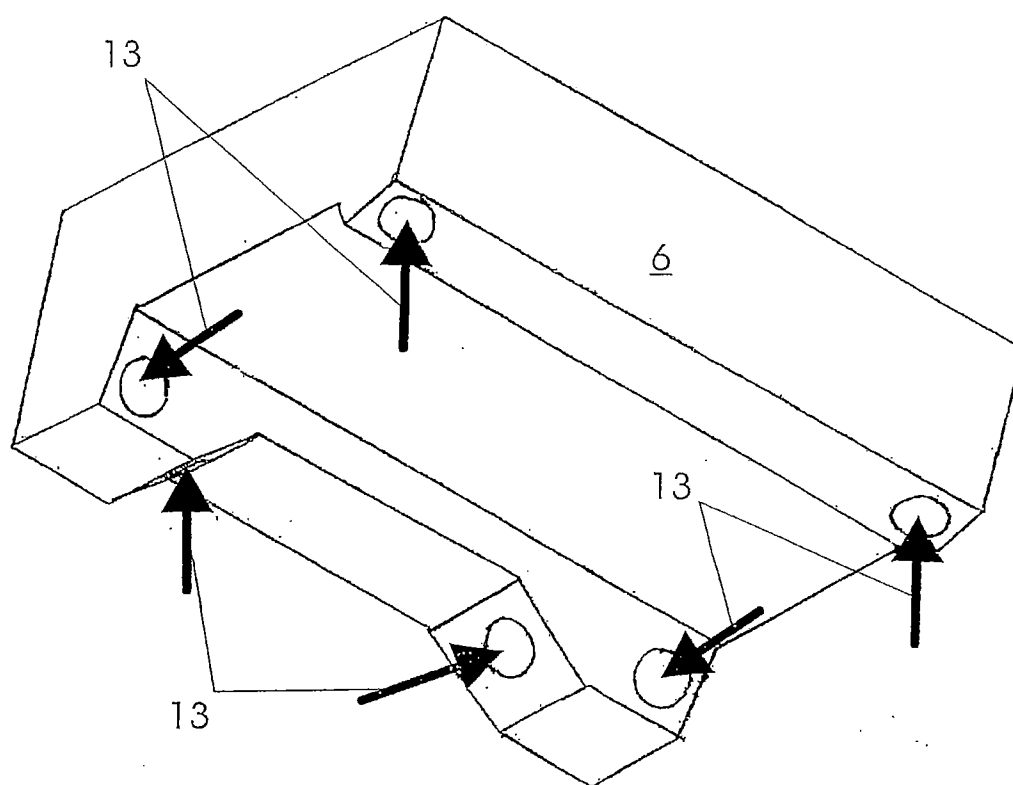


Fig. 8

## INTERNATIONAL SEARCH REPORT

International Application No

EP2004/004235

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B7/00 G03F7/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US 6 147 818 A (HALE LAYTON C ET AL)<br>14 November 2000 (2000-11-14)   | 1-8,<br>12-14         |
| Y          | the whole document  | 9-11                  |
| Y          |   | 9-11                  |
| Y          | EP 1 278 089 A (ZEISS CARL SEMICONDUCTOR<br>MFG ; ASML NETHERLANDS BV (NL))<br>22 January 2003 (2003-01-22)<br>claims 1-3 | 10,11                 |
| Y          | EP 1 321 823 A (ASML NETHERLANDS BV)<br>25 June 2003 (2003-06-25)<br>figure 2   | 9                     |
| A          | US 6 031 598 A (TICHENOR DANIEL A ET AL)<br>29 February 2000 (2000-02-29)<br>the whole document                           | 1-14                  |
|            | -----<br>-/--   |                       |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

12 October 2004

Date of mailing of the international search report

27/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Thieme, W

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/004235

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |  |                       |
|--|--|-----------------------|
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages                   | Relevant to claim No. |
| A  | US 2002/163741 A1 (SHIBAZAKI YUICHI)<br>7 November 2002 (2002-11-07)<br>the whole document<br>-----  |                       |
| A  | US 6 325 351 B1 (HALE LAYTON C ET AL)<br>4 December 2001 (2001-12-04)<br>the whole document<br>----- |                       |
| X  | "CATALOG 2003"<br>2003, LINOS , XP002300333<br>pages N2,L2<br>-----                                  | 1                     |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/004235

| Patent document<br>cited in search report |    | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|----|---------------------|--|--|
| US 6147818                                | A  | 14-11-2000          | AU<br>WO 2050400 A<br>0038017 A1   | 12-07-2000<br>29-06-2000   |
| EP 1278089                                | A  | 22-01-2003          | DE 10134387 A1<br>EP 1275995 A2<br>EP 1278089 A2<br>JP 2003163160 A<br>JP 2003158070 A<br>US 2003010902 A1<br>US 2003058422 A1 | 23-01-2003<br>15-01-2003<br>22-01-2003<br>06-06-2003<br>30-05-2003<br>16-01-2003<br>27-03-2003 |
| EP 1321823                                | A  | 25-06-2003          | EP 1321822 A1<br>EP 1321823 A2<br>CN 1442755 A<br>JP 2003203860 A<br>US 2003197914 A1  | 25-06-2003<br>25-06-2003<br>17-09-2003<br>18-07-2003<br>23-10-2003                             |
| US 6031598                                | A  | 29-02-2000          | NONE   |  |
| US 2002163741                             | A1 | 07-11-2002          | AU 7775801 A<br>EP 1312965 A1<br>WO 0216993 A1<br>JP 2002162549 A<br>TW 521317 B<br>JP 2002131605 A                            | 04-03-2002<br>21-05-2003<br>28-02-2002<br>07-06-2002<br>21-02-2003<br>09-05-2002               |
| US 6325351                                | B1 | 04-12-2001          | AU 2295901 A<br>WO 0150476 A1  | 16-07-2001<br>12-07-2001   |